




PAE / PME / PRE Series $\phi 25\text{mm}$ / $\phi 45\text{mm}$ / $\phi 56\text{mm}$ LED Tower Light

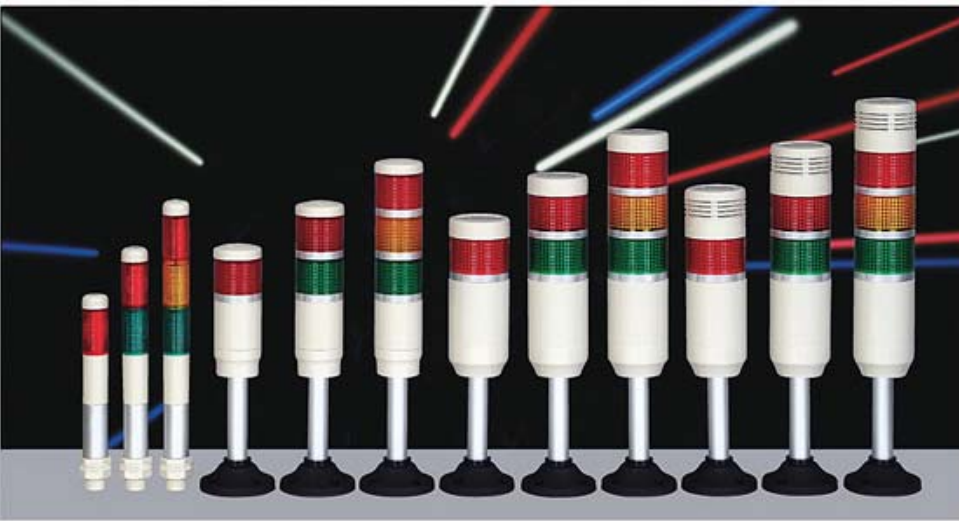

Ordering information (표준주문사양)

PME G F 3 02 RYG

① ② ③ ④ ⑤ ⑥

①	PAE	$\phi 25$ Tower Light
	PME	$\phi 45$ Tower Light
	PRE	$\phi 56$ Tower Light
②	G	black base (no pole)
	P	Pole+black base
	M	Pole screw+nut (M20)
③	F	Flashing (점멸)
	B	Buzzer (PRE ser 적용)
	Z	Flashing light+Buzzer (PRE ser 적용)
④	1	1 Stack (Red)
	2	2 Stack (Red+Green)
	3	3 Stack (R+Amber+G)
	4	4 Stack (R+A+G+Blue)
	5	5 Stack (R+A+G+B+Clear)
⑤	01	12VAC/ DC
	02	24VAC/ DC
	10	110V (PRE)
	20	230V (PRE)
	FF	100V ~ 230V (PME)
⑥	R	Red lens
	G	Green lens
	A	Amber lens (Y)
	B	Blue lens
	C	Clear lens

최부고정구는 page 15를 참조하십시오
 옵션 Buzzer kits (MPZ 56E)는 PRE series에 적용.

Features (특징)




- Prism-cut lenses for even light distribution
- Selectable Base, Pole or Wall bracket mounting
- Steady and flashing models
- 5 stack light color available
- Various operating voltage available
- Buzzer kit (MPZ 56E) adaptable for PRE series
- LED light provide long life and reliability
- $\phi 45\text{mm}$, $\phi 56\text{mm}$ 투광준렌즈 적용
- 프리즘 반사구조에 의한 반사광증폭
- 1단 ~ 5단으로 설계 적용된 적층형 구조 및 다양한 mount 체결구조
- 부저기능을 옵션 적용 (PRE ser 적용)
- 5가지 색상의 투광렌즈
- 다양한 전압 사양
- 장시간 수명의 LED 투입
- 내충격, 내진동 흡수용 완충 Rubber 적용

Specifications (전기적 사양)

Series	PAE series	PME series	PRE series
Power supply	12V AC/DC, 24V AC/DC, 120V AC, 240V AC		
IP level	IP 56		
Lens color	Red, Green, Yellow, Blue, Clear		
Flash rate	80 / min		
PAE series Current consumption	1 Stack	12V:30mA, 24V:25mA	
	2 Stack	12V:65mA, 24V:60mA	
	3 Stack	12V:100mA, 24V:90mA	
	4 Stack	12V:135mA, 24V:120mA	
	5 Stack	12V:170mA, 24V:150mA	
PME series Current consumption	1 Stack	12V:41mA, 24V:27mA, 120V:28mA, 240V:28mA	
	2 Stack	12V:89mA, 24V:57mA, 120V:60mA, 240V:60mA	
	3 Stack	12V:149mA, 24V:95mA, 120V:99mA, 240V:99mA	
	4 Stack	12V:204mA, 24V:125mA, 120V:131mA, 240V:131mA	
	5 Stack	12V:240mA, 24V:155mA, 120V:163mA, 240V:163mA	
PRE series Current consumption	1 Stack	12V:54mA, 24V:28mA, 110V:25mA, 240V:25mA	
	2 Stack	12V:109mA, 24V:62mA, 110V:57mA, 240V:57mA	
	3 Stack	12V:169mA, 24V:102mA, 110V:91mA, 240V:91mA	
	4 Stack	12V:223mA, 24V:136mA, 110V:124mA, 240V:124mA	
	5 Stack	12V:275mA, 24V:169mA, 110V:155mA, 240V:155mA	
Bulb type	LED Modular		
Buzzer kit	No buzzer	Available MPZ 56E	
Sound level	No buzzer	80 dB (85mA)	
Termination	Wire leads		
Approvals	CE		

Dimensions (외형치수도)

(UNIT: mm)

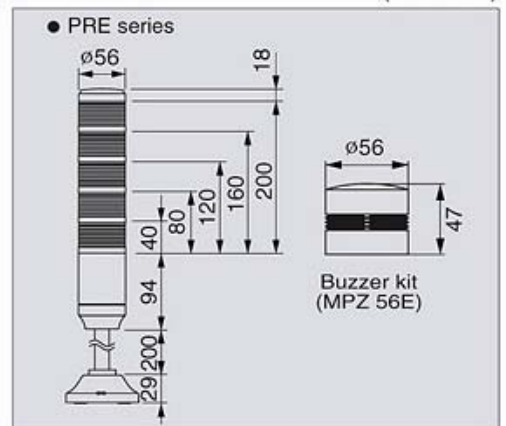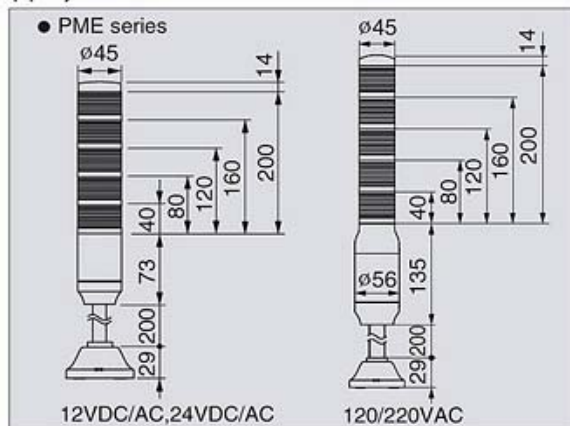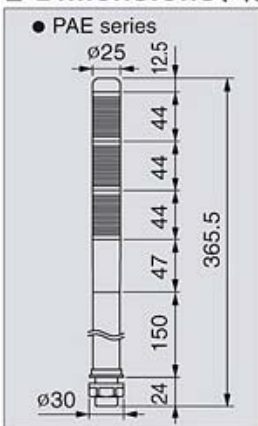

PAE/PME /PRE Connections

* You may change the order of LED modules but the same wire will always control a given modules.

